



Page | 1 of 4

TENDER SPECIFICATION SHEET Friiva[™] gate & fence flood protection barrier

Applications:

Protecting valuable assets and people

The Friiva™ Gate & Fence Flood protection barrier has many applications in flood protection response and can be used by business owners and individuals. The barrier is easy to handle and requires no special skills or equipment. The Friiva™ Gate & Fence Flood protection barrier has many applications and can be used door gate barrier in buildings and fence barrier around property as well as permanent installed around equipment and utilities as it is easy to remove for maintenance

The Friiva™ gate & fence flood protection barrier

Fast and easy deployable aluminum flood protection barrier for fences, gates and doors

Friiva Gate and Fence barriers is a unique modular system made from aluminum. The system is versatile and can be customized to most height and length requirements to protect building or areas as required.

The barrier panels and posts are constructed in durable aluminum alloy. The aluminum barrier panels provide flood protection in vertical increments of 200 mm logs/planks.

The barrier panels stack on top of one another and most applications can be installed by one person.

The Cold Flood Prevention barrier can be used to control and protect against rising water levels in exposed areas such as housing, commercial buildings, infrastructure, and airports etc.



The Friiva™ fence flood protection barrier



The Friiva™ gate flood protection barrier

34/11 Phatthana Wet 8, Sukumvit Soi 71, Khwaeng Phra Khanong Nuea, Watthana, Bangkok 10110, TH Tel: +66 20 95 56 95 Fax: +66 20 95 56 90 email: infor@as-friis.com website: www.as-friis.com

AS Friis Ltd.





Page | 2 of 4

TENDER SPECIFICATION SHEET

Friiva™ gate & fence flood protection barrier

Dimension and weight:

TECHNICAL DATA	NF 35 LT	NF 35	NF 100
anel / Log / Beam			
anel Height	200 mm	200 mm	200 mm
anel Thickness	35 mm	35 mm	100 mm
anel material gauge	1.6 mm	2.5 mm	3.0 mm
anel weight per M	2.6 kg	3.7 kg	5.9 kg
lax protection height	600 mm	1,200 mm	4,600 mm
lax length (width)*	3,500 mm	6,000 mm	6,000 mm
laterial			
nels,	Aluminum		
ost and extension poles	Aluminum		
ress down tools	SUS 304		
ottom seals	PU/PE		
anel & Post seals	Ethylene Propylene Diene Monomer Rubber (EPDM)		

AS Friis Ltd.






Page | 3 of 4


TECHNICAL DATA SHEET

Friiva™ gate & fence flood protection barrier

Installation & Accessories:

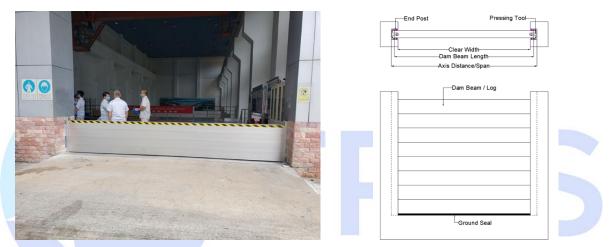

Friiva[™] Door gate flood protection single span with mounting post on the side

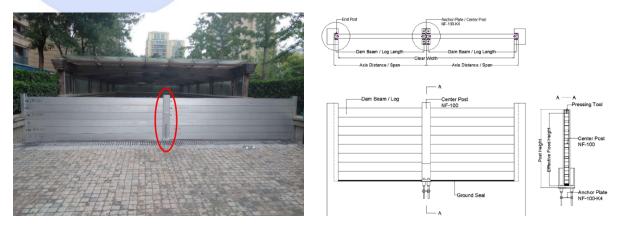

Friiva[™] Door gate flood protection single dual (multiple) span with mounting post on the side and demountable extension post in the center.






Page | 4 of 4

TECHNICAL DATA SHEET

Friiva™ gate & fence flood protection barrier

Post and extension pole options:

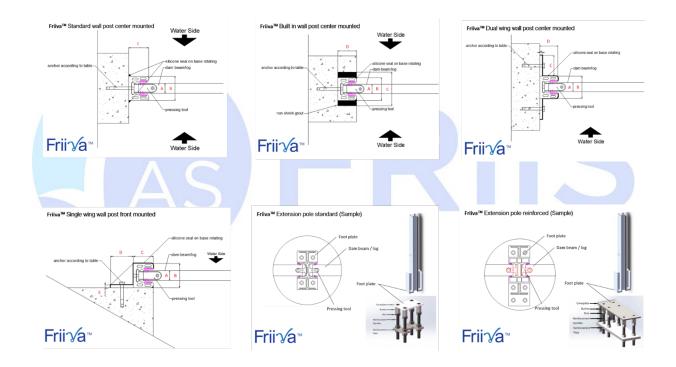

AS Friis Ltd.